




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>D04H 1/54</b>	<b>A1</b>	(11) International Publication Number: <b>WO 95/23888</b> (43) International Publication Date: 8 September 1995 (08.09.95)
(21) International Application Number: PCT/GB95/00431 (22) International Filing Date: 1 March 1995 (01.03.95) (30) Priority Data: 9403911.2                      1 March 1994 (01.03.94)                      GB (71) Applicant (for all designated States except US): THE VICTORIA UNIVERSITY OF MANCHESTER [GB/GB]; Oxford Road, Manchester M13 9PL (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): TALLENTIRE, Alan [GB/GB]; 16 Green Villa Park, Wilmslow, Cheshire SK9 6EJ (GB). SINCLAIR, Colin, Samuel [GB/GB]; 19 Birch Polygon, Rusholme, Manchester M14 5HX (GB). (74) Agent: STUART, Ian, A.; Mewburn Ellis, York House, 23 Kingsway, London WC2B 6HP (GB).	(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).  Published <i>With international search report.          Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: POROUS FILM

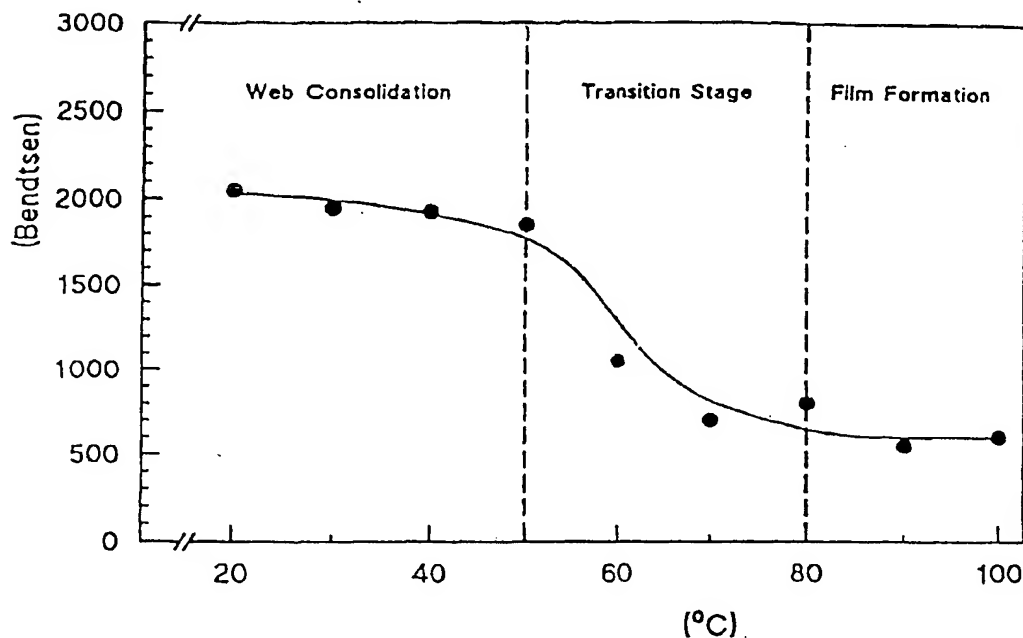

(57) Abstract

A method of producing a porous film comprises subjecting a fibrous material comprised of fibres of a film-forming material to conditions of heat and pressure to convert the fibrous material to a porous film. The method allows the production of film material having substantially uniform pore sizes. For example, the pore size distribution of the film may be such as to have a ratio of maximum pore size: mean flow pore of less than 1.2, e.g. less than 1.1.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgystan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

POROUS FILMTechnical Field

The present invention relates to porous films, methods of producing such film, and uses of such films.

5 (Note: the term 'porous' is used herein, unless the context requires otherwise, to mean 'possessing through-pores'.)

Background Art

Conventional films of plastics materials are  
10 generally essentially non-porous. Thus they are commonly used to provide impermeable barriers. A thin film can be of good mechanical strength.

Porous webs of fibrous materials are well-known, e.g. papers and both woven and non-woven webs. Such  
15 materials have pores with wide size ranges. Some pores will be very large, so that barrier properties will be significant only if the materials are thick, so that the pores are long and convoluted. Thin webs will have poor barrier properties and are also likely to have  
20 poor mechanical strength (particularly with non-woven webs).

In the production of non-woven webs, an initially-produced loose web is commonly compacted by calendering. This may be carried out under conditions  
25 of temperature and pressure such that there is some bonding of fibres, thus producing a stabilised fibrous web, e.g. as described in EP-A-0116845. That document

also discloses the treatment of polyethylene fibre webs under more severe conditions to convert them to impermeable films. This is not generally a useful technique. If a film of a plastics material is required, it is cheap and easy to produce it directly from a melt (by extrusion and, if necessary, stretching). It is more expensive to extrude fibres and convert these to a non-woven web, and a further conversion step would add to the expense.

Composite webs with a film bonded to a fibrous web are also known. They may be treated so that the film becomes apertured, giving the composite some limited permeability (e.g. US-A-4,684,568: treatment by calendering; US-A-4,898,761: needling of the film). Such materials have low permeability, are quite expensive to produce, and are of limited applicability.

We have appreciated that there would be many potential uses for porous films with controlled pore sizes, particularly if they were 'breathable', i.e. of substantial permeability. For example, medical and surgical items are generally supplied in a sterile state enclosed within individual packages fabricated in part from porous materials. Such porous materials are of necessity permeable to gases and vapours so as to permit sterilisation of the item (after packaging) by means of steam or a gas such as ethylene oxide. Furthermore, permeability to air is important to allow the application of a vacuum during sterilisation, to

facilitate the packaging process and to limit the air volume around the packaged item. However, in spite of this air permeability the material must act as an effective barrier to the passage of micro-organisms to that the packaged item remains sterile. Conventional polymeric films possess little or no gas permeance and consequently their use is limited to forming a non-porous part of a medical package.

Other examples of potential uses for porous films with controlled pore sizes include filtration (e.g. of particles from liquids) and controlled release of vapours.

The natural assumption is that if you subject a web having pores of a range of sizes to sufficient heat and pressure, the result will be a general reduction in the sizes of the pores, leading to a progressive closing of pores, starting with the smallest ones. It could not have been predicted whether it would be possible to isolate part-treated materials (before complete closure of all pores). But there was no incentive to try, since the materials would not be expected to be of interest. They would be expected to have lost most of their permeability, owing to the general reduction in pore sizes; they would also be expected to have lost most of their barrier properties, since the inevitable reduction in thickness would have removed most of their ability to act as depth filters, whereas the pore size distribution would mean that they

still possessed a proportion of relatively large pores.

Disclosure of the Invention

Surprisingly we have now found that it is possible to convert a fibrous web into a porous film in which  
5 the pore size distribution is controlled, and may bear little resemblance to that of the original web. In a particularly preferred type of embodiment, a fibrous web having a wide range of pore sizes (e.g. being a  
non-woven web with a log-normal distribution) is  
10 converted into a film having substantially uniform pores. It is not that all but the largest pores have closed up: their number is so small that such a material would be virtually non-porous. By some mechanism which we do not yet fully understand, a large  
15 number of pores, originally of many sizes are converted to pores of what is virtually a single size. The result can be a true membrane filter: a thin film which has the ability to act as a filter by a sieving mechanism. Known so-called membrane filters are, in  
20 fact, much farther from this ideal.

According to a first aspect of the present invention there is provided a method of producing a porous film comprising subjecting a fibrous material comprised of fibres of a film forming material to  
25 conditions of heat and pressure to convert said fibrous material to a porous film.

The conditions may be selected by subjecting samples of the material to treatment at a range of

temperatures and/or pressures, monitoring the air permeance or a related parameter of the treated samples thereby to determine conditions for forming porous films; and then carrying out the production of porous film under such conditions.

The method of the invention results in a porous, and preferably breathable, film. The pores in the film are preferably of uniform pore size. Their nature depends on the conditions of treatment such as temperature, pressure and time. It also depends on the properties of the web of fibrous material, e.g. the chemical nature and physical properties such as fibre diameter and "substance" (i.e. the openness and/or thickness of the web, affecting the mass per unit area).

The invention is mainly, though not exclusively, concerned with the conversion of non-woven webs, including melt-blown webs and spun-bonded webs.

The term 'pore size' has its conventional meaning, i.e. for a given pore, it is the minimum cross-sectional size throughout the length of the pore. For a given sample of material, pore size distribution is represented by a differential flow distribution (percentage differential flow vs pore size) in which maximum pore size is the diameter of the pore of largest minimum cross-sectional area; minimum pore size is the diameter of the pore of smallest cross-section

area, and mean flow pore is the diameter of the pore through which 50% of the cumulative gas flow passes across the sample. The ratio of the maximum pore size to the mean flow pore is a measure of the effective pore size range within the material. Pore size distributions can be measured by conventional fluid displacement techniques.

---

It is preferred that the application of heat and pressure to the fibrous material is effected at a nip through which the fibrous material passes. Thus a preferred method practising the invention is to calender the material.

Generally, both rolls of the calender are heated. It is desirable that both faces of the web should be thermally and mechanically treated. Thus the method is generally to be applied to single-layer webs and not laminates.

The conditions of temperature and pressure employed in the method of the invention are sufficient to convert the fibrous material to a porous film; this conversion is also referred to herein as 'film-forming'. We have found that there is a critical combination of temperature and pressure above which the method of the invention becomes operative to produce the porous film. The conditions required to 'film-forming' porous webs will vary from web type to web type but will be readily ascertained by a person skilled in the art. We have found for example that



calendering at a pressure above 250 pound per linear inch (pli) (45kg/cm) at temperature in excess of 50°C (e.g. 70-100°C) is suitable for a number of polymers. The final film will generally differ from the fibrous web in that the latter will generally be opaque whereas the former will have a degree of transparency.

A wide variety of porous webs comprising fibres can be used in the present invention. The fibres are preferably of a polymeric material. For example, the porous web may comprise one or more of the following polymeric fibres: polyethylene, polypropylene, polyurethane, nylon, polyester, rayon, co polymer, EVA, EMA (ethyl methacrylate) and EVOH (ethylene vinyl alcohol). (The specific requirement is that the fibre is capable of 'film-forming'.) In addition, the polymeric fibre may include chemical additives such as fluorochemicals, colour agents, and antimicrobial agents. Different fibre types will require different temperature/pressure conditions to effect film-forming. Use may be made of multiconstituent fibres, i.e. fibres with definable phase boundaries between different constituents. Examples of classes of biconstituent fibres include sheath-core, side-by-side, and matrix fibril fibres. For example a web of sheath-core or other multiconstituent fibres could be processed under conditions such that one or more constituents formed a film, in which fibres of at least one other constituent remained e.g. as reinforcement. Use may be made of

multi-denier melt-bonded webs.

The web may be a non-woven material or a woven material. Ideally the material has a weight in excess of  $15 \text{ gm}^{-2}$ . This is for very fine (sub- $\mu\text{m}$ ) fibres.

5 Coarser fibres have higher minima. Other things being equal, a heavier web (thicker and/or a higher concentration of fibres) gives a film with smaller pores.

---

The method of the invention allows the production  
10 of porous film having a pore structure comprising pores which are substantially uniform in size. Thus, for example, the method of the invention allows the production of porous films in which the ratio of maximum pore size: mean flow pore is less than 1.2,  
15 more preferably less than 1.1. Our preliminary work has included the preparation of materials with a ratio as low as 1.005, and it is clear that it will be possible to better this. But in practice, for most purposes, a ratio of 1.05 (or below) represents  
20 essential uniformity of pore size. Such porous films are believed to be novel and therefore according to a second aspect of the present invention there is provided a porous film material wherein the pore size distribution has a ratio of maximum pore size: mean  
25 flow pore of less than 1.2.

A particular application of the invention is to produce films having a pore structure that comprises pores which are substantially uniform in size. These

uniform pore structures are characteristic of 'film-formed' webs and yield porous films with controlled barrier function.

#### Brief Description of Drawings

5 Figs. 1, 2 and 3 are graphs showing differential flow distribution through samples of the web 'A' used in Example 1 before treatment, after treatment at 20°, and after treatment at 90°;

10 Figs. 4 and 5 are graphs showing how the treatment temperature in Example 1 affected air pressure and the ratio of maximum pore size: mean flow pore; and

Figs. 6 and 7 are graphs showing differential flow distribution through samples of the web 'B' used in Example 2 after treatment at 90° and 110° respectively.

#### 15 Modes for Carrying Out the Invention

The following examples are provided to illustrate the invention. We used a laboratory calender, only one of whose rolls was heated. Therefore the material was passed through twice, with inversion between passes.

20 The conditions were:

nip pressure	700 pli (130 Kg/cm)
number of nips	1
porous web width	30 cm
speed	10 m/min
25 size of test samples	17.3 cm <sup>2</sup>

#### Example 1

A 50 gm<sup>-2</sup> melt-blown polymeric web (designated web A), fabricated from polyethylene fibres, was calendered employing the above conditions. The method was carried

out at varying roller temperatures (ranging from 20 to 90°C) so as to provide different calendering conditions. Prior to calendering, web A had an air permeance of around 30,000 Bendtsen and a pore size distribution as depicted in Figure 1. The distribution is log normal and is quite wide, the minimum and maximum sizes being 7.2 and 17.3  $\mu\text{m}$  and the mean flow pore size being 9.1 $\mu\text{m}$ . Treatment with a nip

---

temperature of 20°C gave a web with an air permeance of 2,050 Bendtsen. Over the nip temperature range 20-50°C, air permeance is observed to fall slightly with increasing temperature. However, between 50 and 80°C nip temperature, there is a marked change in the air permeance of the calendered web with a level of around 600 Bendtsen being achieved at a nip temperature of 90°C and above. The overall response can be considered to fall into the distinct behaviours:

- 20 - 50°C - web consolidation (no film formation)
- 50 - 80°C - transition stage between web consolidation and film formation
- 80 - 100°C - film formation

Figures 2 and 3 give the pore size distribution data generated for consolidated web A (nip temperature at 20°C) and 'film-formed' web A (nip temperature at 90°C) respectively. The consolidated web shows a log normal pore size distribution like that of the uncalendered polymeric web though compressed so that

the corresponding maximum, minimum and mean values are 8.9, 2.9 and 4.9 $\mu$ m. In contrast, the film-formed web has a very narrow pore size distribution. The mean size (1.43) hardly differs from the maximum size (1.46). The minimum size is 0.57 $\mu$ m. Thus the pores are substantially uniform in size. Percentage differential flow peaks at around 23% for the film-formed web as opposed to 8% for the consolidated web. This dramatic change in pore size distribution, due to operation of the method of the invention, is further shown by the ratio of maximum pore size to mean flow pore. Figure 5 is a plot of the ratio of maximum pore size and mean flow pore vs nip temperature for web A. Points are mean values of five determinations. (Bars represent standard error of mean values.) For comparative purposes the maximum/mean pore ratio for the uncalendered polymeric web is also included. It is seen from Figure 5 that the maximum/mean pore ratio is around 1.75 for the uncalendered web A. Over the nip temperature range corresponding to web consolidation (up to 50°C), this ratio remains effectively constant. However, on attaining the nip temperature to initiate film-formation (around 50°C for web A at 700 pli) the maximum/mean pore ratio falls progressively to achieve a value of around 1.05 at the film-forming nip temperatures of 90°C and above. In practice, a maximum/mean pore ratio of 1.05 indicates a pore structure comprising pores substantially of the same

size.

### Example 2

A 40 gm<sup>-2</sup> melt-blown polymeric web (designated web B), fabricated from polypropylene fibres, was calendered employing nip pressure of 700 pli at temperatures ranging from 20 to 110°C. Table 1 lists data generated for calendered web B at four different nip temperatures together with data for uncalendered web B.

10

Nip Temperature (°C)	Air Permeance (Bendsten)	Max. Pore Size Mean Flow Pore
Uncalendered	34,832	1.32
20	20,899	1.46
50	8,147	1.46
90	2,366	1.53
110	428	1.03

15

20

For web B, employing nip pressure of 700 pli, a nip temperature of 110°C is identified to yield a 'film-formed' web comprising substantially uniform pores (a maximum/mean flow pore ratio of 1.03 as opposed to a ratio of around 1.32 for uncalendered web B and around 1.48 for web B consolidated at nip temperatures up to and including 90°C.) Figures 6 and 7 show pore size distributions for web B calendered at nip temperatures of 90 and 110°C respectively. Note that the graph for treatment at 90°C (Fig. 6) shows a small peak at about

30

1.6 $\mu$ m with almost all pores being larger. But with treatment at 110° (Fig. 7), this peak at about 1.6 $\mu$ m now dominates. There is practically nothing else. All of the pores have become of this size.

5        As in Example 1, percentage differential flow is observed to peak at a substantially higher level of around 20% for the 'film-formed' web (nip temperature of 110°C) as opposed to around 7% for the consolidated web (nip temperature of 90°C). This difference is in  
10        keeping with the method of the invention in which a polymeric web is converted to a porous film comprising pores of substantially uniform size.

          From the permeance values and the pore sizes, it is possible to calculate the numbers of pores in the  
15        film-formed products. For the "converted" films of examples 1 and 2 these values are 8.5 and 3.4 x 10<sup>6</sup> pores/cm<sup>2</sup>. These figures are probably imprecise, but it is no doubt the case that the films had of the order of 1-10 million pores per square centimetre. If the holes  
20        were direct cylindrical openings, the values for 1 and 2 would correspond to 14% and 7% of the surface area being occupied by openings.

CLAIMS

1. A method of producing a porous film  
comprising subjecting a fibrous material comprised of  
fibres of a film forming material to conditions of heat  
5 and pressure to convert said fibrous material to a  
porous film.

2. A method according to claim 1 wherein said  
~~conditions are selected so that the porous film~~  
material has a ratio of maximum pore size: mean flow  
10 pore of less than 1.2.

3. A method according to claim or claim 2  
wherein said conditions are selected by subjecting  
samples of the material to treatment at a range of  
temperatures and/or pressures, monitoring the air  
15 permeance or a related parameter of the treated samples  
thereby to determine conditions for forming porous  
films; and then carrying out the production of porous  
film under such conditions.

4. A method according to any preceding claim  
20 wherein the fibres comprise a polymeric material.

5. A method according to claim 4 wherein the  
polymeric material is or includes a polyethylene,  
polypropylene, polyurethane, polyamide, polyester or  
rayon.

25 6. A method according to claim 4 wherein the  
polymer is or includes EVA, EMA or EVOH.

7. A method according to any preceding claim  
wherein the heat and pressure are applied by a



calendering the fibrous material.

8. A method according to claim 7 wherein  
calendering is effected by passing the fibrous material  
through at least one nip between a pair of rollers  
5 which contact its opposed faces, each face being  
contacted by a heated roller.

9. A method according to claim 7 or 8 wherein  
the calendering is effected using a pressure in excess  
of 250 pli (45kg/cm) at a temperature in excess of  
10 50°C.

10. A method according to any preceding claim  
wherein the fibrous material is a non-woven material.

11. A method according to any of claims 1-9  
wherein the fibrous material is a woven material.

12. A method according to any preceding claim  
15 wherein the fibrous material contains fibres of  
different diameters and/or different materials.

13. A porous film material wherein the pore size  
distribution has a ratio of maximum pore size: mean  
20 flow pore of less than 1.2.

14. A film material according to claim 13  
wherein said ratio is less than 1.1.

15. A film material according to claim 13 wherein  
said ratio is 1.05 or less.

25 16. A film material according to any of claims  
13-15 having a permeance of at least 100 Bendtsen  
units.

17. A film material according to any of claims  
13-15 having a permeance of at least 200 Bendtsen

units.

18. A film material according to any of claims 13-15 having a permeance of at least 400 Bendtsen units.




5 19. A film material according to any of claims 13-18 having a least  $10^5$  pores/cm<sup>2</sup>.

20. A film material according to any of claims

---

~~14 19 as preparable by a method according to any of~~  
claims 1-13.

1 / 3

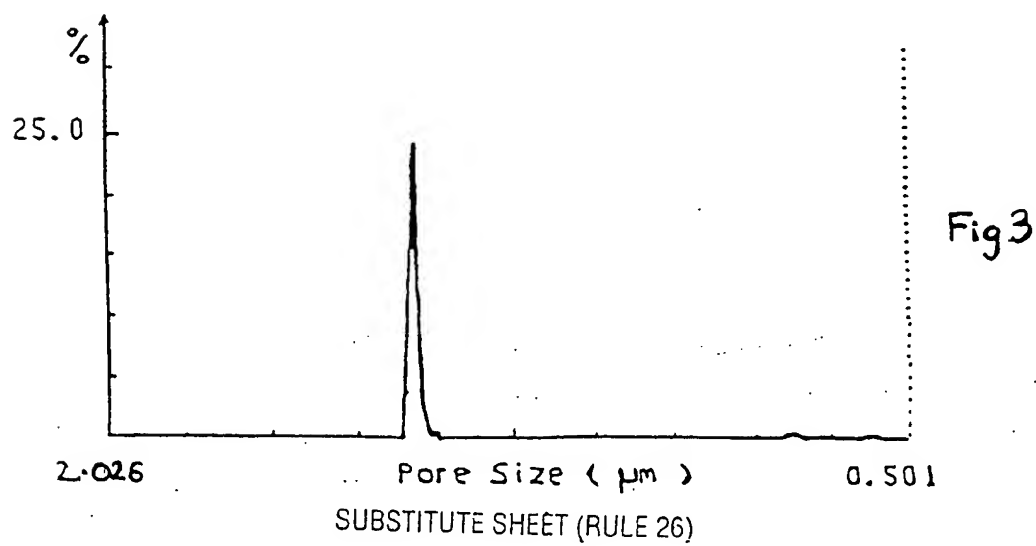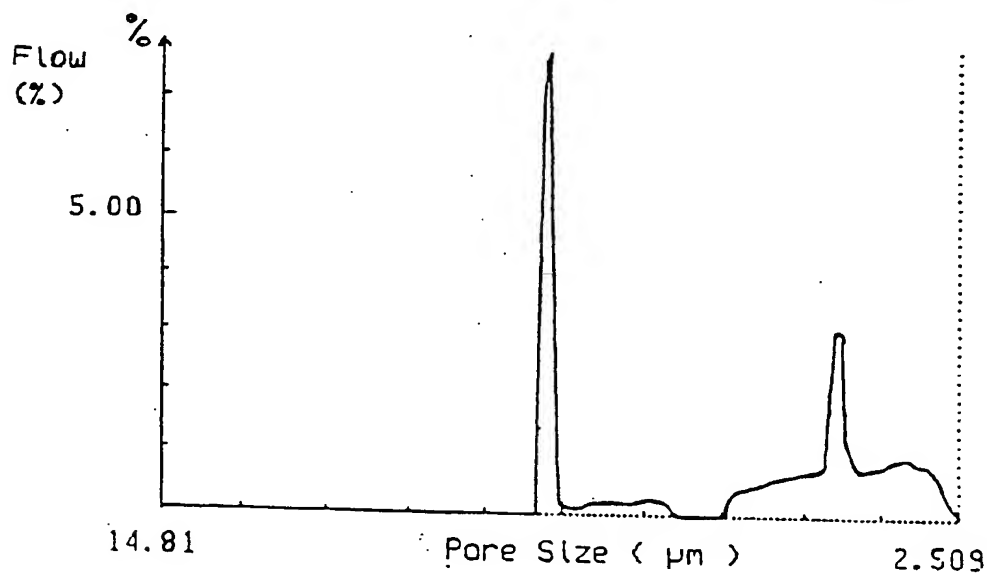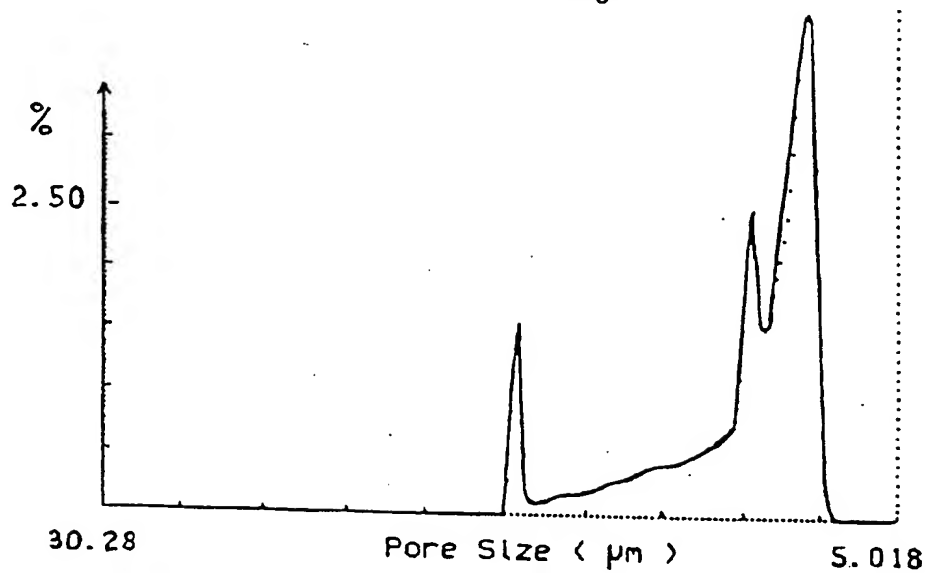

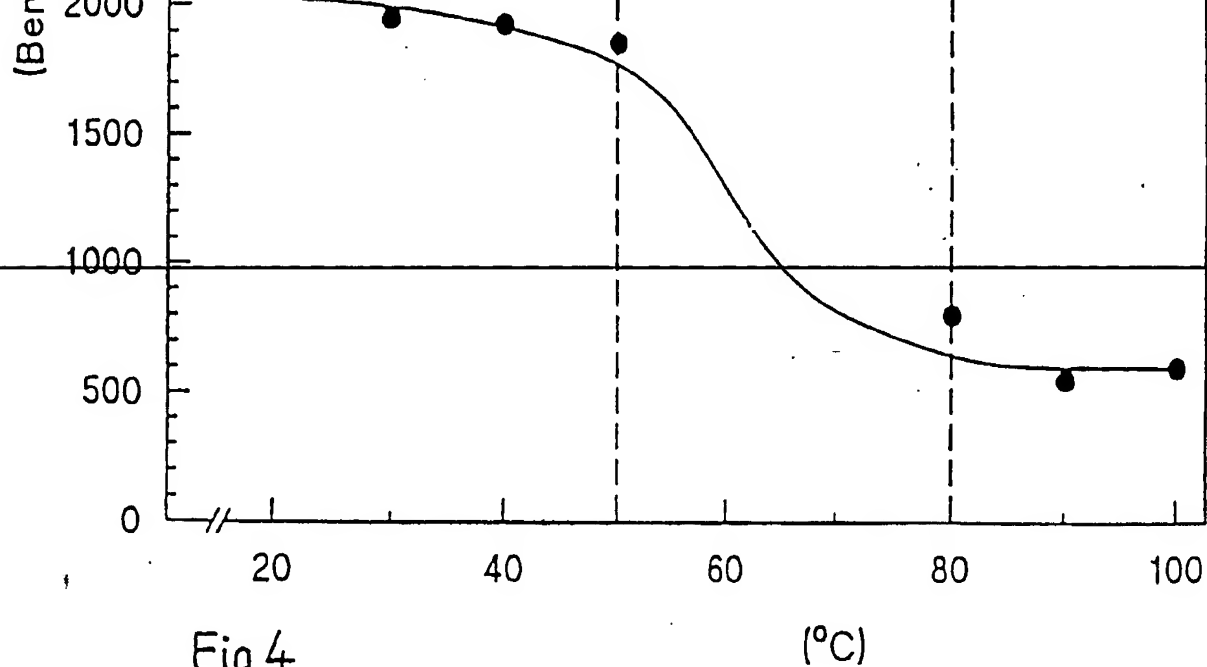


Fig 4

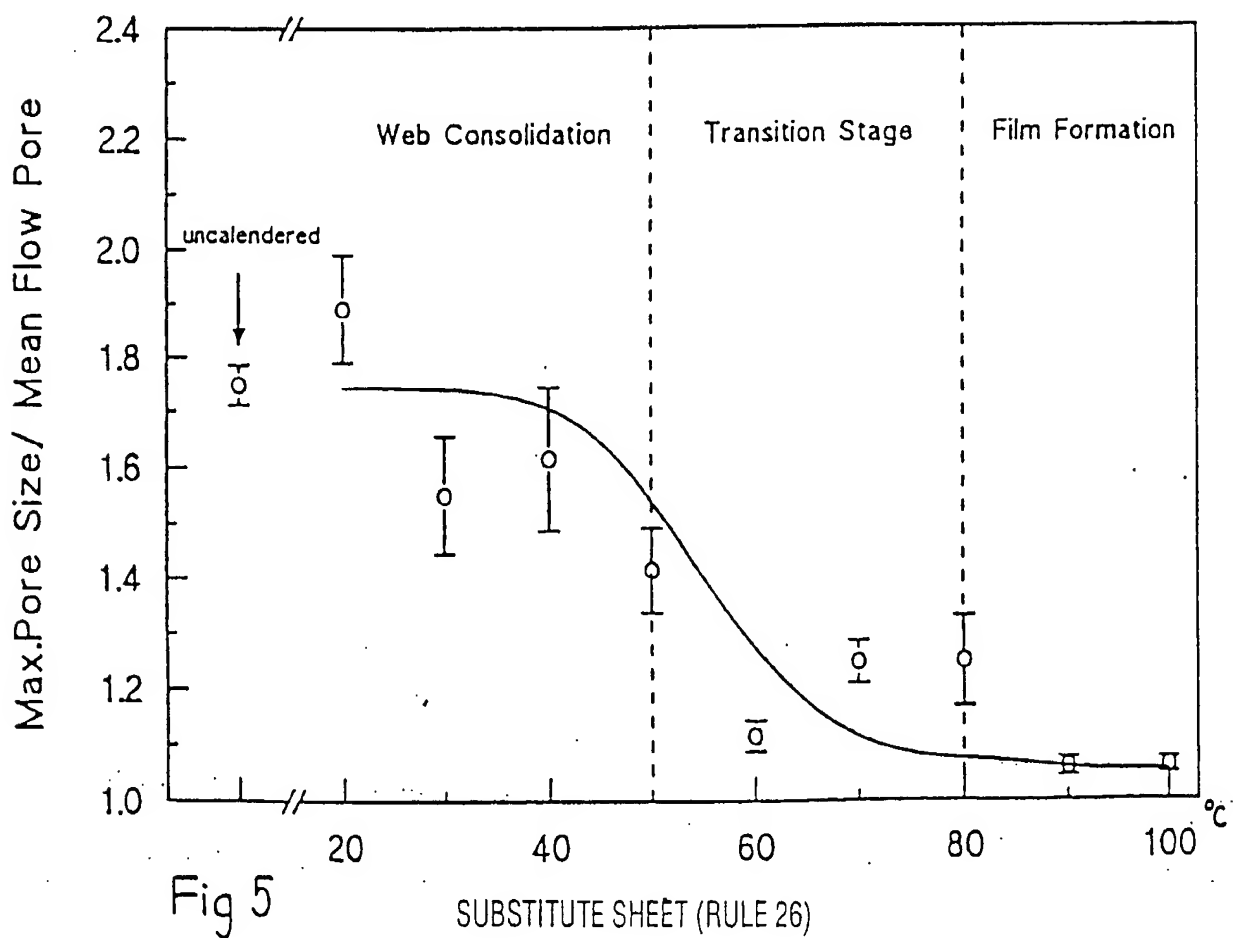


Fig 5

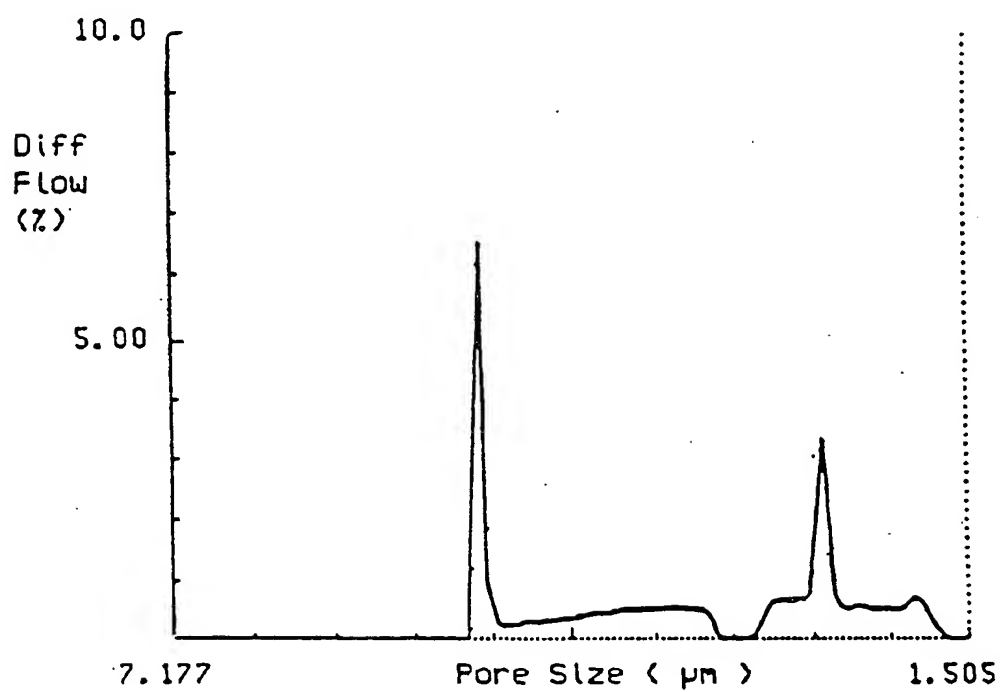


Fig 6

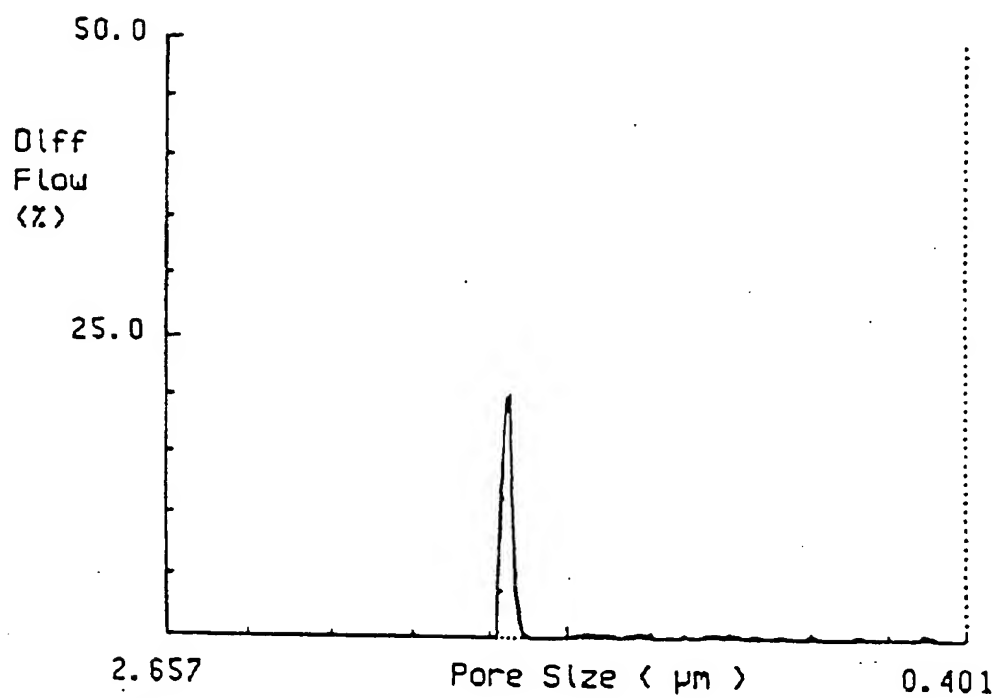


Fig 7

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 95/00431A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 D04H1/54

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB-A-2 195 366 (KENDALL & CO) 7 April 1988 see page 1, line 40 - page 3, line 40; example 1	1
A	DE,A,27 39 705 (SUMITOMO ELECTRIC INDUSTRIES) 16 March 1978 see page 6, line 1, paragraph 2 - page 13, line 9, paragraph 2; examples 1-6	1
A	EP-A-0 116 845 (ALLIED CORP) 29 August 1984 see page 2, line 26 - page 7, line 7	1
A	EP-A-0 201 029 (BAYER AG) 12 November 1986 see page 5, line 28 - page 11, line 27	1

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

29 June 1995

Date of mailing of the international search report

12. 07. 95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patenlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+ 31-70) 340-3016

Authorized officer

V Beurden-Hopkins, S

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 95/00431

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-2195366	07-04-88	DE-A- 3729567	17-03-88
		FR-A- 2604030	18-03-88
		JP-A- 63114055	18-05-88
		US-A- 4987024	22-01-91
		US-A- 5075990	31-12-91
DE-A-2739705	16-03-78	JP-C- 1402611	28-09-87
		JP-A- 53030668	23-03-78
		JP-B- 60003842	31-01-85
		CA-A- 1099464	21-04-81
		FR-A, B 2363351	31-03-78
		GB-A- 1586224	18-03-81
		US-A- 4277429	07-07-81
		US-A- 4248924	03-02-81
EP-A-0116845	29-08-84	CA-A- 1218209	24-02-87
		JP-A- 59163458	14-09-84
		US-A- 5135804	04-08-92
EP-A-0201029	12-11-86	DE-A- 3516425	13-11-86
		JP-A- 61255831	13-11-86
		US-A- 4923660	08-05-90

---

**THIS PAGE BLANK (USPTO)**